
BLINDS DIRECT

CLEARGUARD FITTING INSTRUCTIONS


STAY SAFE WITH A FEW SIMPLE STEPS

Stay in contact while still social distancing with our Clearguard PVC vinyl screen. Helping to prevent the spread of viruses by providing a clear barrier between interactions. Providing both protection and reassurance, Clearguard can be fitted to suspended ceilings with its simple clip in design.



FITTING THE SUSPENSION CEILING BRACKET


Take your suspension ceiling bracket and angle it so the bracket sits flush against your suspended ceiling grid. Once you have done this, twist the bracket until it clips into place. Once clipped into place you can slide the bracket along your ceiling joint into your desired place. Repeat this process for the other brackets you have been provided with, ensuring the cords are straight.

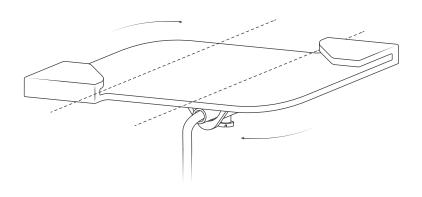

ADJUSTING THE HEIGHT

If required, you can adjust the height of your Clearguard. To do this, we recommend removing the product and putting it on a flat surface.

Take a flat headed screwdriver and turn the barrel clamp to the left until the nylon wire becomes loose. Pull through the nylon wire until it is the length you require. Once at your desired length, take your flat headed screwdriver and turn the barrel clamp to the right to tighten it again. Repeat this step with the second barrel clamp to ensure Clearguard hangs straight.





Blinds Direct | Unit 2 Jubilee Way | Grange Moor | Wakefield | West Yorkshire | WF4 4TD | UK | Tel: 01924 481729 | Email: info@blindsdirect.co.uk Place of registration: UK, Registration number: 04966706, VAT Registration Number 817 3168 28