


ROMAN BLIND STANDARD HEADRAIL FITTING INSTRUCTIONS

FITTING COMPONENTS


Assembly and installation of this product can be completed by non-professionals, in accordance with current trade and safety standards. Please consult a professional if any doubt exists.



Fixing brackets:
quantity to suit
length of blind




Wood screws:
4+



Screws: 4+
Rawl plugs: 4+



Child safety
device

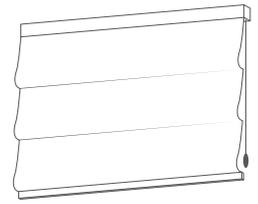

Blind

FITTING HARDWARE



Drill



Philips head
screwdriver



Stepladder




Drill bit



Pencil

1 BRACKET POSITION

Place blind in fitting position, space the brackets evenly.

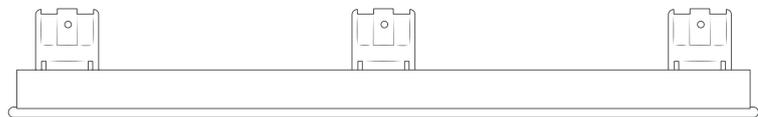



2 INSTALLING BRACKETS

Face Fixing (fig a)

Position brackets against the surface and mark out the holes in the back of the brackets. Use rawl plugs if fitting to the wall.

Top Fixing (fig b)

Position bracket against the surface and mark out the holes in the top of the bracket. Use rawl plugs if fitting to the wall.

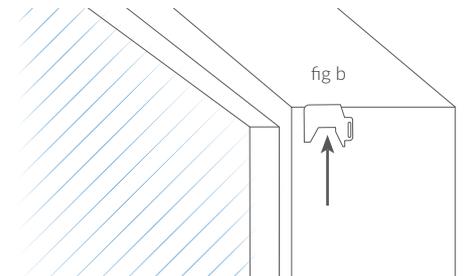
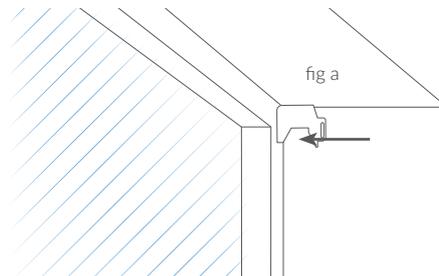


3 FITTING THE HEADRAIL

Clip the headrail onto the supports by resting the rail onto position A and press back.

To remove the rail, depress and release catch B.

The headrail shall not be installed at less than 1.5 m from the floor.

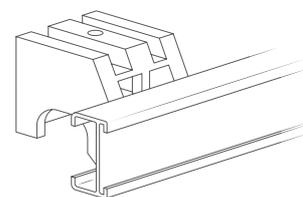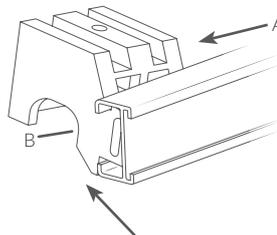

4 OPERATING YOUR BLIND

- Once installed, use the operating cord at the side to raise and lower your blind.
- To lower the blind, pull the cord towards the centre of the blind to release the locking mechanism, and allow the blind to lower.
- To raise the blind, pull the cord until the blind reaches the desired height and move the cord towards the edge of the blind to allow the locking mechanism to lock the cord in place.

Child Safety Device (Safety Cleat)

The accumulation device shall be installed as close to the headrail as possible, and no less than 1.5m from the floor.

1. Use double sided tape, or similar, to stick the tensioning device to the wall temporarily while preparing to drill and screw permanently into place.
2. Always wrap all loose cords around the cleat in a figure of 8 pattern.



Young children can be strangled by loops in pull cords, chains, tapes, and inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist and create a loop.